

PERFORMANCE EVALUATION OF RICE BROWN OIL IN HIGH GRADE LOW HEAT REJECTION DIESEL ENGINE

M. V. S. MuraliKrishna^{1†}, N. DurgaPrasada Rao², A. Anjeneya Prasad³ and P. V. K. Murthy⁴

ABSTRACT

Aim: Experiments were conducted to evaluate the performance of a high grade low heat rejection (LHR) diesel engine with air gap insulated piston, air gap insulated liner and ceramic coated cylinder head [ceramic coating of thickness 500 microns was done on inside portion of cylinder head] with different operating conditions [normal temperature and pre-heated temperature] of crude rice brawn oil (CRBO) with varied injection pressure and injection timing. **Study Design:** Performance parameters of brake thermal efficiency, exhaust gas temperature, volumetric efficiency and sound intensity were determined at various values of brake mean effective pressure (BMEP). **Methodology:** Exhaust emissions of smoke and oxides of nitrogen (NO_x) were recorded at the various values of BMEP. Combustion characteristics at peak load operation of the engine were measured with TDC (top dead centre) encoder, pressure transducer, console and special pressure-crank angle software package. **Results:** Conventional engine (CE) showed deteriorated performance, while LHR engine showed improved performance with CRBO operation at recommended injection timing and pressure and the performance of both version of the engine improved with advanced injection timing and at higher injection pressure when compared with CE with pure diesel operation. The optimum injection timing was 32°bTDC for CE while it was 31°bTDC with LHR engine with CRBO operation. Peak brake thermal efficiency increased by 12%, smoke levels decreased by 6%, NO_x levels increased by 41% and sound intensity decreased by 24% with CRBO operation on LHR engine at its optimum injection timing when compared with diesel operation on CE at manufacturer's recommended injection timing of 27°bTDC. (Before top dead centre)

KEYWORDS: Crude Rice Brawn Oil, CE, LHR engine, Fuel Performance, Exhaust Emissions, Sound Intensity, Combustion Characteristics.

INTRODUCTION

The rapid depletion of petroleum fuels and their ever increasing costs have led to an intensive search for alternate fuels. The most promising substitutes for diesel fuels are alcohols and vegetable oils. However, most of the alcohol produced was diverted to Petro-chemical Industries. It has been predicted that by the year 2030 all the present sources of fossil fuels would get depleted and the world would come to a stand still for need of fuel power. So, it is high time that scientists and echnologists developed an alternate fuel that would run on the existing engines without many modifications and also one that would cater to the ever increasing power needs of the countries and domestic market. It has been found that the vegetable oils are promising substitutes, because of their properties are similar to that of diesel fuel and they are renewable and can be easily produced. Rudolph diesel, the inventor of the engine that bears his name, experimented with fuels ranging from powdered coal to peanut oil. Several researchers [1-8] experimented the use of vegetable oils as fuel on conventional engines (CE) and reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. Not only that, the common problems of crude vegetable oils in diesel engines are formation of carbon deposits, oil ring sticking, thickening and gelling of lubricating oil as a result of contamination by the vegetable oils. These problems can be solved, if neat vegetable oils were chemically modified to bio-diesel [9]. The process of converting the oil into methyl esters or biodiesel was carried out [9] by heating the crude oil at around 60-70°C with the methanol in the presence of the 0.5% of catalyst (Sodium hydroxide) based on weight of the oil for about 3 hours. At the end of the reaction, excess methanol was removed by distillation and glycerol, which separates out was removed. The methyl esters were treated with dilute acid to neutralize the alkali and then washed to get free of acid, dried and distilled to get pure vegetable oil esters. These biodiesels have low viscosity and low molecular weight compared to crude vegetable oil. Investigations were carried out [10-22] on biodiesel in CE and reported compatible performance with biodiesel in comparison with pure diesel operation on CE. The drawbacks of the vegetable oils both crude vegetable oil and biodiesel call for LHR engine. These prospects of improving the design and performance generated impetus to active research on adiabatic or more appropriately, LHR or insulated engines. The concept of LHR engine is to minimize heat loss to the coolant by providing thermal insulation in the path of the heat flow to the coolant.

LHR engines were classified depending on degree of insulation as low grade LHR engines, medium grade LHR engines and high grade LHR engines. The concept of LHR engine is to minimize heat loss to the coolant by providing thermal insulation in the path of the heat flow to the coolant. LHR engines were classified depending on degree of insulation as low grade LHR engines, medium grade LHR engines and high grade LHR engines.

Low grade LHR engines consisted of thermal coatings on piston, liner and cylinder head with low thermal conductivity materials, medium grade LHR engines provide an air gap in the piston and other engine components with superni (an alloy of nickel), cast iron and mild steel etc., while high grade LHR engine was the combination of low and medium grade LHR engines. Ceramic coatings provided adequate insulation and improved brake specific fuel consumption (BSFC) which was reported by various researchers. However previous studies [23-27] with pure diesel in LHR engine with ceramic coated components revealed that the thermal efficiency variation of LHR engine not only depended on the heat recovery system, but also depended on the engine configuration, operating condition and physical properties of the insulation material. Investigations were also carried out [28-31] ceramic coated engines with biodiesel and reported that biodiesel with LHR engine improved performance and decreased the emission levels. Air gap was created in the nimonic piston crown and experiments were conducted [32] with pure diesel and reported that BSFC increased by 7% with varied injection timings. Investigations were carried [9] with air gap insulated piston with superni crown and air gap insulated liner with superni insert with varied injection pressures and injection timings with alternate fuels of alcohols and vegetable oils and reported LHR engine improved efficiency and decreased. Experiments were conducted [33] with pongamia oil and jatropha oil based biodiesel in high grade LHR engines and reported performance improved with LHR engine. The present paper attempted to evaluate the performance of LHR engine, which contained an air gap insulated piston, air gap insulated liner and ceramic coated cylinder head with different operating conditions of CRBO with varying engine parameters of change of injection pressure and timing and compared with pure diesel with CE at recommended injection timing and injection pressure. The properties of CRBO and diesel fuel are presented in Table 1.

Table 1. Properties of test fuels

Test Fuel	Viscosity at 25°C (Centi-poise)	Density at 25°C	Cetane number	Calorific value (kJ/kg)
Diesel	12.5	0.84	55	42000
CRBO	80	0.90	45	39000

¹Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology, Gandipet, Hyderabad

²Hindustan Aeronautics Limited, Bangalore


³Mechanical Engineering Department, J.N.T. U. College of Engineering, Hyderabad

⁴Vivekananda Institute of Science and Information Technology, Shadnagar, Mahabubnagar

METHODOLOGY

The low heat rejection diesel engine contained a two-part piston - the top crown made of low thermal conductivity material, superni-90 was screwed to aluminum body of the piston, providing a 3mm-air gap in between the crown and the body of the piston. The optimum thickness of air gap in the air gap piston was found [17] to be 3-mm for better performance of the engine with superni inserts with diesel as fuel. A superni-90 insert was screwed to the top portion of the liner in such a manner that an air gap of 3-mm was maintained between the insert and the liner body. Partially stabilized zirconium (PSZ) of thickness 500 microns was coated on inside portion of cylinder head. Experimental setup used for the investigations of LHR diesel engine with crude rice brawn oil (CRBO) was shown in Figure 1.

Figure 1. Experimental Set-up

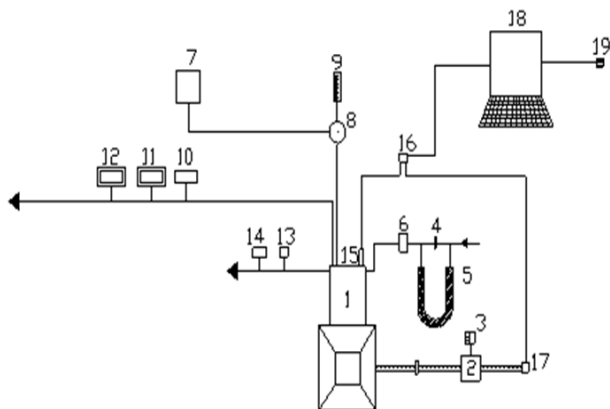

1. Engine, 2. Electrical Dynamo meter, 3. Load Box, 4. Orifice meter, 5. U-tube water manometer, 6. Air box, 7. Fuel tank, 8. Pre-heater, 9. Burette, 10. Exhaust gas temperature indicator, 11. AVL Smoke meter, 12. Netel Chromatograph NOx Analyzer, 13. Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter, 15. Piezo-electric pressure transducer, 16. Console, 17. TDC encoder, 18. Pentium Personal Computer and 19. Printer

CE had an aluminum alloy piston with a bore of 80-mm and a stroke of 110-mm. The rated output of the engine was 3.68 kW at a speed of 1500 rpm. The compression ratio was 16:1 and manufacturer's recommended injection timing and injection pressures were 27°bTDC and 190 bar respectively. The fuel injector had 3-holes of size 0.25-mm. The combustion chamber consisted of a direct injection type with no special arrangement for swirling motion of air. The engine was connected to electric dynamometer for measuring its brake power. Burette method was used for finding fuel consumption of the engine. Air-consumption of the engine was measured by air-box method. The naturally aspirated engine was provided with water-cooling system in which inlet temperature of water was maintained at 60°C by adjusting the water flow rate. Engine oil was provided with a pressure feed system.

No temperature control was incorporated, for measuring the lube oil temperature. Copper shims of suitable size were provided in between the pump body and the engine frame, to vary the injection timing and its effect on the performance of the engine was studied, along with the change of injection pressures from 190 bar to 270 bar (in steps of 40 bar) using nozzle testing device. The maximum injection pressure was restricted to 270 bar due to practical difficulties involved. Exhaust gas temperature (EGT) was measured with thermocouples made of iron and iron-Constantan. Emission levels of smoke and NO_x were recorded by AVL smoke meter and Netel Chromatograph NO_x analyzer respectively at various values of BMEP. Piezo electric transducer, fitted on the cylinder head to measure pressure in the combustion chamber was connected to a console, which in turn was connected to Pentium personal computer. TDC encoder provided at the extended shaft of the dynamometer was connected to the console to measure the crank angle of the engine. A special P-θ software package evaluated the combustion characteristics such as peak pressure (PP), time of occurrence of peak pressure (TOPP), maximum rate of pressure rise (MRPR) and time of occurrence of maximum rate of pressure rise (TOMRPR) from the signals of pressure and crank angle at the peak load operation of the engine. Pressure-crank angle diagram was obtained on the screen of the personal computer.

RESULTS AND DISCUSSION

Performance Parameters

Figure 3 indicates that CE with CRBO showed the deterioration in the performance for entire load range when compared with the pure diesel operation on CE at recommended injection timing. Although carbon accumulations on the nozzle tip might play a partial role for the general trends observed, the difference of viscosity between the diesel and CRBO provided a possible explanation for the deterioration in the performance of the engine with CRBO operation. In addition, less air entrainment by the fuel spay suggested that the fuel spray penetration might increase and resulted in more fuel reaching the combustion chamber walls. Furthermore droplet mean diameters (expressed as Sauter mean) were larger for CRBO leading to reduce the rate of heat release as compared with diesel fuel. This also, contributed the higher ignition (chemical) delay of the CRBO due to lower cetane number.

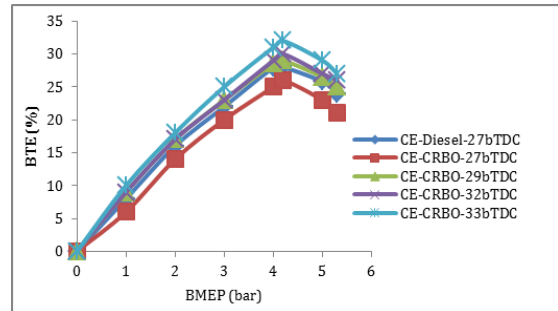


Figure 2. Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in conventional engine (CE) at different injection timings with crude rice brawn oil (CRBO) operation

According to the qualitative image of the combustion under the CRBO operation with CE, the lower BTE was attributed to the relatively retarded and lower heat release rates. BTE increased with the advancing of the injection timing in CE with the CRBO at all loads, when compared with CE at the recommended injection timing and pressure. This was due to initiation of combustion at earlier period and efficient combustion with increase of air entrainment in fuel spray giving higher BTE. BTE increased at all loads when the injection timing was advanced to 32°bTDC in the CE at the normal temperature of CRBO. The increase of BTE at optimum injection timing over the recommended injection timing with CRBO with CE could be attributed to its longer ignition delay and combustion duration. BTE increased at all loads when the injection timing was advanced to 32°bTDC in CE, at the preheated temperature of CRBO. That, too, the performance improved further in CE with the preheated CRBO for entire load range when compared with normal CRBO. Preheating of the CRBO reduced the viscosity, which improved the spray characteristics of the oil and reduced the impingement of the fuel spray on combustion chamber walls, causing efficient combustion thus improving BTE. Curves from Figure 3 indicate that LHR version of the engine showed improvement in the performance for entire load range compared with CE with pure diesel operation.

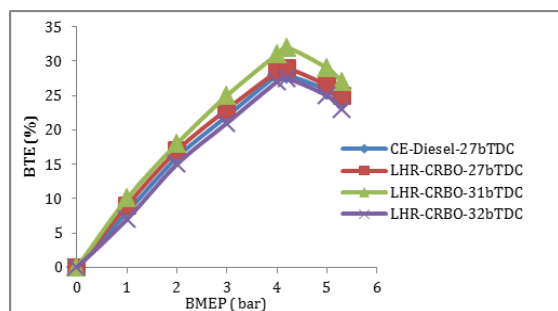


Figure 3. Variation of BTE with BMEP in LHR engine at different injection timings with CRBO operation

High cylinder temperatures helped in better evaporation and faster combustion of the fuel injected into the combustion chamber. Reduction of ignition delay of the CRBO oil in the hot environment of the LHR engine improved heat release rates and efficient energy utilization. Preheating of

CRBO improved performance further in LHR version of the engine. The optimum injection timing was found to be 31°bTDC with LHR engine with normal CRBO. Since the hot combustion chamber of LHR engine reduced ignition delay and combustion duration and hence the optimum injection timing was obtained earlier with LHR engine when compared with CE with the CRBO operation. It could be noticed from Figure 4, at optimum injection timing, BTE with LHR engine was higher than that of CE. Decrease of combustion duration and better evaporation rates would help in increasing the efficiency of LHR engine.

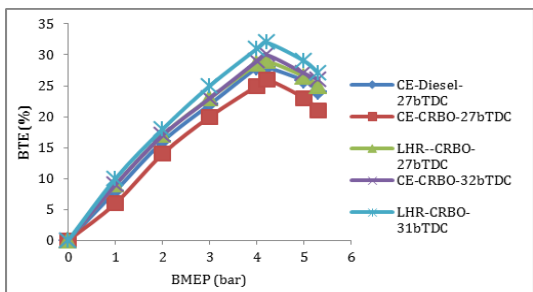


Figure 4. Variation of BTE with BMEP in different versions of the engine at the recommended injection timing and optimum injection timing at an injection pressure of 190 bar with CRBO

Table 2. Data of peak BTE

Injection Timing (°bTDC)	Test Fuel	Peak BTE (%)												
		Conventional Engine (CE)						LHR Engine						
		Injection Pressure (Bar)		Injection Pressure (Bar)		Injection Pressure (Bar)		Injection Pressure (Bar)		Injection Pressure (Bar)		Injection Pressure (Bar)		
190	230	270	190	230	270	NT	PT	NT	PT	NT	PT	NT	PT	
27	DF	28	--	29	---	30	--	29	--	30	--	30.5	--	
	CRBO	26	27	27	28	28	29	29	30	30	31	31	32	
29	DF	28.5	--	29.5	--	30.2	--	29.5	--	30.5	--	31	--	
	CRBO	27	28	28	29	30	31	30	31	31	32	32	33	
30	DF	29	---	30	--	30.5	--	29	--	30	--	30.5	--	
	CRBO	28	29	29	30	30	31	31	32	32	33	32	33	
31	DF	29.5	--	30	--	31	--	--	--	--	--	--	--	
	CRBO	29	30	30	31	29	30	32	33	33	34	32	33	
32	DF	30		30.5		30.5								
	CRBO	30	31	29	30	29	30	--	--	--	--	--	--	
33	DF	31		31		30	---	--	--	--	--	--	--	

DF-Diesel Fuel, CRBO- Crude rice brawn oil, NT- Normal or Room Temperature, PT- Preheat Temperature

Injection pressure was varied from 190 bars to 270 bars to improve the spray characteristics and atomization of the CRBO and injection timing was advanced from 27 to 34°bTDC for CE and LHR engine. From Table-2, it was evident that BTE increased with increase in injection pressure in both versions of the engine at different operating conditions of the CRBO. The improvement in BTE at higher injection pressure was due to improved fuel spray characteristics. However, the optimum injection timing was not varied even at higher injection pressure with LHR engine, unlike the CE. Hence it was concluded that the optimum injection timing was 32°bTDC at 190 bar, 31°bTDC at 230 bar and 30°bTDC at 270 bar for CE. The optimum injection timing for LHR engine was 31°bTDC irrespective of injection pressure. Peak BTE was higher in LHR engine when compared with CE with different operating conditions of the CRBO. Figure 5 indicates that CE with CRBO at the recommended injection timing recorded higher EGT at all loads compared with CE with pure diesel operation. Lower heat release rates and retarded heat release associated with high specific energy consumption caused increase in EGT in CE.

Ignition delay in the CE with different operating conditions of CRBO increased the duration of the burning phase. LHR engine recorded lower value of EGT when compared with CE with CRBO operation. This was due to reduction of ignition delay in the hot environment with the provision of the insulation in the LHR engine, which caused the gases expanded in the cylinder giving higher work output and lower heat rejection. This showed that the performance improved with LHR engine over CE with CRBO operation. The magnitude of EGT at peak load decreased with advancing

of injection timing and with increase of injection pressure in both versions of the engine with CRBO. Preheating of CRBO further reduced the magnitude of EGT, compared with normal CRBO in both versions of the engine. From the Table-3, it could be noticed that EGT decreased with increase in injection pressure and injection timing with both versions of the engine, which confirmed that performance increased with increase of injection pressure. Preheating of CRBO decreased EGT in both versions of the engine.

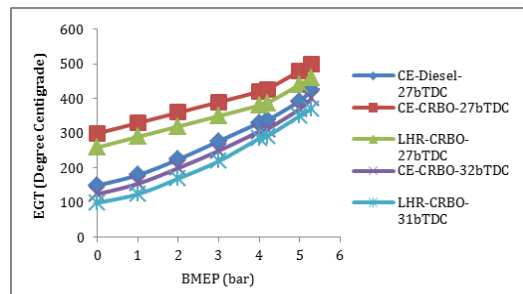


Figure 5. Variation of exhaust gas temperature (EGT) with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with CRBO operation

From Figure 6, it is noticed that volumetric efficiency (VE) decreased with an increase of BMEP in both versions of the engine. This was due to increase of gas temperature with the load. At the recommended injection timing, VE in the both versions of the engine with CRBO operation decreased at all loads when compared with CE with pure diesel operation. This was due to increase of temperature of incoming charge in the hot environment created with the provision of insulation, causing reduction in the density and hence the quantity of air with LHR engine. VE increased marginally in CE and LHR engine at optimized injection timings when compared with recommended injection timings with CRBO. This was due to decrease of un-burnt fuel fraction in the cylinder leading to increase in VE in CE and reduction of gas temperatures with LHR engine.

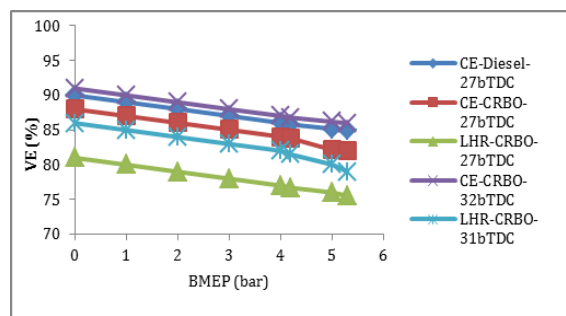


Figure 6. Variation of volumetric efficiency (VE) with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with CPO operation

Table 3. Data of EGT at peak load operation

Injection timing (° b TDC)	Test Fuel	EGT at the peak load (°C)											
		CE						LHR Engine					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	425	--	410	---	395	--	460	---	450	--	440	--
	CRBO	500	475	475	450	450	425	460	430	430	400	400	370
29	DF							440	430			420	
	CRBO	475	450	450	425	425	400	430	400	410	390	390	370
30	DF	410	---	400	--	385	---	460	---	450	--	440	--
	CRBO	450	425	425	400	400	375	400	370	370	340	340	310
31	DF	400	---	390	--	375	---	450	---	445	---	440	---
	CRBO	425	400	400	375	400	375	370	340	340	310	340	310
32	DF	390		380		380							--
	CRBO	400	375	400	375	400	375	-----	---	---	----	---	-
33	DF	375	---	375	---	400	--	--	--	---	---	--	--

From the Table-3, it could be observed that VE increased marginally with the advancing of the injection timing and with the increase of injection pressure in both versions of the engine. This was due to better fuel spray characteristics and evaporation at higher injection pressures leading to marginal increase of VE. This was also due to the reduction of residual fraction of the fuel, with the increase of injection pressure. Table-4 showed the variation of VE with injection pressure and injection timing at different operating conditions of CRBO with different configurations of the engine. Preheating of the CRBO marginally improved VE in both versions of the engine, because of reduction of un-burnt fuel concentration with efficient combustion, when compared with the normal temperature of oil.

Exhaust Emissions

Figure 8 indicates that the value of smoke intensity increased from no load to full load in both versions of the engine. During the first part, the smoke level was more or less constant, as there was always excess air present. However, in the higher load range there was an abrupt rise in smoke levels due to less available oxygen, causing the decrease of air-fuel ratio, leading to incomplete combustion, producing more soot density. The variation of smoke levels with BMEP, typically showed a U-shaped behavior due to the pre-dominance of hydrocarbons in their composition at light load and of carbon at high load. Drastic increase of smoke levels was observed at the peak load operation in CE at different operating conditions of the CRBO, compared with pure diesel operation on CE. This was due to the higher magnitude of the ratio of C/H of CPO (1.13) when compared with pure diesel (0.45). The increase of smoke levels was also due to decrease of air-fuel ratios and VE with CRBO compared with pure diesel operation. Smoke levels were related to the density of the fuel. Since CRBO has higher density compared to diesel fuels, smoke levels are higher with CRBO. However, LHR engine marginally reduced smoke levels due to efficient combustion and less amount of fuel accumulation on the hot combustion chamber walls of the LHR engine at different operating conditions of the CRBO compared with the CE. Density influences the fuel injection system. Decreasing the fuel density tends to increase spray dispersion and spray penetration. Preheating of the CRBO reduced smoke levels in both versions of the engine, when compared with normal temperature of the CRBO. This was due to i) the reduction of density of the CRBO, as density was directly proportional to smoke levels, ii) the reduction of the diffusion combustion proportion in CE with the preheated CRBO, iii) the reduction of the viscosity of the CRBO, with which the fuel spray does not impinge on the combustion chamber walls of lower temperatures rather than it directed into the combustion chamber. From Table-4, it is evident that smoke levels decreased with increase of injection timings and with increase of injection pressure, in both versions of the engine, with different operating conditions of the CRBO. This was due to improvement in the fuel spray characteristics at higher injection pressures and increase of air entrainment, at the advanced injection timings, causing lower smoke levels. Decreasing the fuel density tends to increase spray dispersion and spray penetration. Preheating of the CRBO reduced smoke levels in both versions of the engine, when compared with normal temperature of the CRBO. This was due to i) the reduction of density of the CRBO, as density was directly proportional to smoke levels, ii) the reduction of the diffusion combustion proportion in CE with the preheated CRBO, iii) the reduction of the viscosity of the CRBO, with which the fuel spray does not impinge on the combustion chamber walls of lower temperatures rather than it directed

into the combustion chamber. From Table-4, it is evident that smoke levels decreased with increase of injection timings and with increase of injection pressure, in both versions of the engine, with different operating conditions of the CRBO. This was due to improvement in the fuel spray characteristics at higher injection pressures and increase of air entrainment, at the advanced injection timings, causing lower smoke levels. Figure 9 shows that NOx levels were lower in CE while they were higher in LHR engine at different operating conditions of the CRBO at the peak load when compared with diesel operation. This was due to lower heat release rate because of high duration of combustion causing lower gas temperatures with the CRBO operation on CE, which reduced NOx levels. Increase of combustion temperatures with the faster combustion and improved heat release rates in LHR engine caused higher NOx levels. As expected, preheating of the CRBO decreased NOx levels in both versions of the engine when compared with the normal CRBO. This was due to improved air fuel ratios and decrease of combustion temperatures leading to decrease NOx emissions in the CE and decrease of combustion temperatures in the LHR engine with the improvement in air-fuel ratios leading to decrease NOx levels in LHR engine.

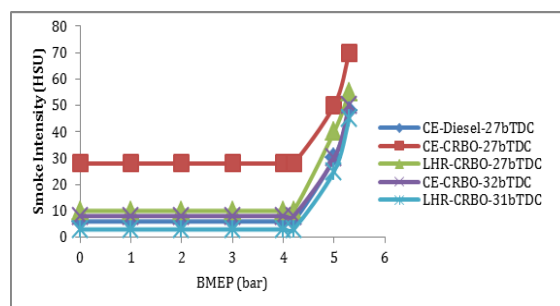


Figure 8. Variation of smoke intensity in Hartridge Smoke Unit (HSU) with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with CRBO

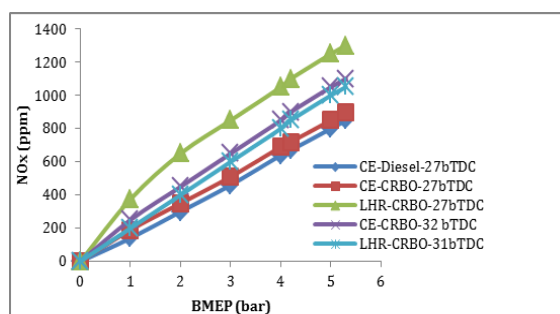


Figure 9. Variation of NOx levels with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with crude CPO operation

Table 4. Data of Volumetric Efficiency at peak load operation

Injection timing (° bTDC)	Test Fuel	Volumetric efficiency (%)											
		CE						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	85	--	86	--	87	--	78	--	80	--	82	--
	CRBO	82	83	83	84	84	85	75.5	76.5	76.5	77.5	77.5	78.5
29	DF							78.5		80.5		82.5	
	CRBO	83	84	84	85	85	86	77	77.5	78.5	79.5	79.5	80.5
30	DF	86	--	87	--	88	--	76	--	77	--	78	--
	CRBO	84	85	85	86	86	87	78	78.5	78.5	79.5	78	79
31	DF	87	--	87.5	--	89	--						
	CRBO	85	86	86	87	85	86	79	79.5	79.5	80.5	78	79
32	DF	87.5	--	88	--	87	--	-	--	-	--	--	-
	CRBO	86	87	85	86	84	85	--	--	--	--	--	--
33	DF	89	--	89	--	86	--	--	--	--	--	--	--

Table 5. Data of Smoke Levels in Hartridge Smoke Unit (HSU) at peak load operation

Injection timing (° bTDC)	Test Fuel	Smoke intensity (HSU)											
		CE						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	48	--	38	--	34	--	55	--	50	--	45	--
	CRBO	70	65	65	60	63	60	55	45	45	40	40	35
29	DF	40	--	36	--	34	--	52	--	48	--	43	--
	CRBO	68	64	63	59	60	57	50	45	45	40	40	35
30	DF	36	--	34	--	32	--	45	--	42	--	41	--
	CRBO	67	64	60	57	61	58	45	40	40	35	35	30
31	DF	33	--	32	--	30	--	43	--	41	--	40	--
	CRBO	60	57	57	54	54	60	40	35	35	30	30	25
32	DF	32	--	31	--	32	--	--	--	--	--	--	--
	CRBO	50	45	45	40	40	35	--	--	--	--	--	-
33	DF	30	--	30	--	35	--	-	--	--	--	--	--

Table 6. Data of NOx levels at peak load operation

Injection timing (° b TDC)	Test Fuel	NOx levels (ppm)											
		CE						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	850	----	810	----	770	---	1300	--	1280	--	1260	--
	CRBO	900	850	850	800	800	750	1300	1250	1250	1200	1200	1150
29	DF	900	--	860	--	820	--						
	CRBO	950	900	900	850	850	800	1225	1175	1175	1125	1125	1075
30	DF	935	--	900	--	860	--	1225	--	1205	--	1185	--
	CRBO	1000	950	950	900	900	850	1150	1100	1100	1050	1050	1000
31	DF	1020	--	980	--	940	--	1150	--	1130	--	1110	--
	CRBO	1050	1000	1000	950	950	900	1075	1025	1025	975	975	925
32	DF	1105	----	1060	---	1020	---	--	--	--	--	--	--
	CRBO	1100	1050	1050	1000	1000	950	--	-	--	--	--	-
33	DF	1190	----	1150	---	1110	---	--	--	--	--	--	-

From Table-5, it is noticed that NOx levels increased with the advancing of the injection timing in CE with different operating conditions of CRBO. Residence time and availability of oxygen had increased, when the injection timing was advanced with the CRBO operation, which caused higher NOx levels in CE. However, NOx levels decreased with increase of injection pressure in CE. With the increase of injection pressure, fuel droplets penetrate and find oxygen counterpart easily. Turbulence of the fuel spray increased the spread of the droplets which caused decrease of gas temperatures marginally thus leading to decrease in NOx levels. Marginal decrease of NOx levels was observed in LHR engine, due to decrease of combustion temperatures, which was evident from the fact that thermal efficiency was increased in LHR engine due to the reason sensible gas energy was converted into actual work in LHR engine, when the injection timing was advanced and with increase of injection pressure.

Sound Intensity

Hence if any fuel is to be tested as an alternate fuel, sound intensity is to be checked with alternate fuels with varied engine conditions. Figure 10 indicates at recommended injection timing, sound intensities drastically increased in CE with CRBO operation in comparison with CE with pure diesel operation. This was due to deterioration in the performance of CRBO operation on CE. High viscosity, poor volatility and high duration of combustion caused improper combustion of CRBO leading to generate high sound levels. LHR engine decreased sound intensity when compared with pure diesel operation on CE. This was because of hot environment in LHR engine improved combustion of CRBO. When injection timings were advanced to optimum, sound intensities were reduced for both versions of the engine, due to early initiation of combustion

Table 6 denotes that the Sound intensity decreased with increase of injection pressure for both versions of the engine with the test fuels. This was due to improved spray characteristic of the fuel, with which there was no impingement of the fuel on the walls of the combustion chamber leading to produce efficient combustion. Sound intensity decreased with increase of injection pressure for both versions of the engine with the test fuels. This was due to improved spray characteristic of the fuel, with which there was no impingement of the fuel on the walls of the combustion chamber leading to produce efficient combustion. At recommended injection timing, CRBO operation on CE produced high levels of sound intensity as combustion was deteriorated due to high viscosity and poor volatility of the fuel and high duration of combustion. However, LHR engine with CRBO operation produced low levels of sound intensity due to the efficient combustion in the hot environment provided by LHR engine. However, when injection timing was advanced to the respective optimum injection timing, combustion improved in both versions of the engine leading to generate low levels of sound. Preheated CRBO reduced sound levels as preheated oil reduced viscosity and improved atomization characteristics of the fuel.

Table 7. Data of sound intensity at peak load operation

Injection timing (°bTDC)	Test Fuel	Smoke intensity (HSU)											
		CE						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	85		80		95		95		90		85	
	CRBO	100	95	98	93	96	91	70	66	66	62	62	58
29	DF	83		81		79		90		85		80	
	CRBO	97	92	92	87	91	86	68	63	63	58	58	53
30	DF	80		78		77		87		82		77	
	CRBO	94	89	92	87	90	85	67	62	62	58	58	52
31	DF	78		77		75		84		79		74	
	CRBO	92	87	90	85	93	87	65	60	60	55	55	50
32	DF	76		75		76		80		75		70	
	CRBO	90	85	93	88	95	88						
33	DF	75		76		77							

Table 8. Data of PP, MRPR, TOPP and TOMRPR at peak load operation

Injection timing (°bTDC)/ Test fuel	Engine version	PP(bar)				MRPR (Bar/deg)				TOPP (Deg)				TOMRPR (Deg)			
		Injection pressure (Bar)				Injection pressure (Bar)				Injection pressure (Bar)				Injection pressure (Bar)			
		190		270		190		270		190		270		190		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27/Diesel	CE	50.4	--	53.5	---	3.1	---	3.4	--	9	-	8	--	0	0	0	0
	LHR	48.1	--	53.0	--	2.9	--	3.1	--	10	--	9	--	0	0	0	0
27/CRBO	CE	47.9	49.8	48.8	50.8	2.1	2.2	2.8	2.9	11	10	11	10	1	1	1	1
	LHR	60.8	61.8	62.1	63.8	3.2	3.3	3.4	3.5	9	9	8	8	1	1	1	1
31/CRBO	LHR	62.75	63.98	64.1	65.88	3.6	3.8	3.8	3.9	8	8	8	8	0	0	0	0
32/CRBO	CE	53.3	54.4			3.4	3.6			9	9			0	0		

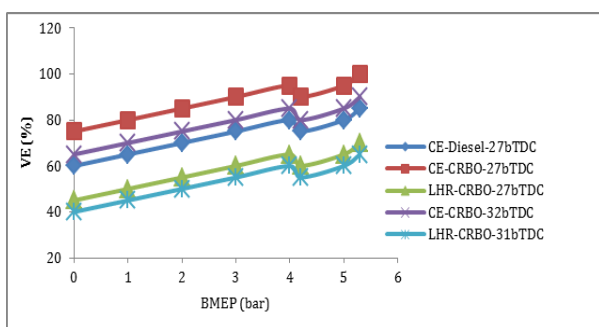


Figure 10. Variation of sound intensity with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with CRBO

Combustion Characteristics

From Table-7, it could be observed peak pressures were lower in CE while they were higher in LHR engine at the recommended injection timing and pressure, when compared with pure diesel operation on CE. This was due to increase of ignition delay, as CRBO require large duration of combustion. Meanwhile the piston started making downward motion

thus increasing volume when the combustion takes place in CE. LHR engine increased the mass-burning rate of the fuel in the hot environment leading to produce higher peak pressures. The advantage of using LHR engine for CRBO was obvious as it could burn low cetane and high viscous fuels. Peak pressures increased with the increase of injection pressure and with the advancing of the injection timing in both versions of the engine, with the CRBO operation. Higher injection pressure produced smaller fuel particles with low surface to volume ratio, giving rise to higher PP. With the advancing of the injection timing to the optimum value with the CE, more amount of the fuel accumulated in the combustion chamber due to increase of ignition delay as the fuel spray found the air at lower pressure and temperature in the combustion chamber. When the fuel- air mixture burns, it produces more combustion temperatures and pressures due to increase of the mass of the fuel. With LHR engine, peak pressures increases due to effective utilization of the charge with the advancing of the injection timing to the optimum value. The magnitude of TOPP decreased with the advancing of the injection timing and with increase of injection pressure in both versions of the engine, at different operating conditions of CRBO. TOPP was more with different operating conditions of CRBO in CE, when compared with pure diesel operation on CE. This was due to higher ignition delay with

the CRBO when compared with pure diesel fuel. This once again established the fact by observing lower peak pressures and higher TOPP, that CE with CRBO operation showed the deterioration in the performance when compared with pure diesel operation on CE. Preheating of the CRBO showed lower TOPP, compared with CRBO at normal temperature. This once again confirmed by observing the lower TOPP and higher PP, the performance of the both versions of the engine improved with the preheated CRBO compared with the normal CRBO.

This trend of increase of MRPR and decrease of TOMRPR indicated better and faster energy substitution and utilization by CRBO, which could replace 100% diesel fuel. However, these combustion characters were within the limits hence the CRBO could be effectively substituted for diesel fuel

CONCLUSIONS

CRBO operation at 27°bTDC on CE showed the deterioration in the performance, while LHR engine showed improved performance, when compared with pure diesel operation on CE. Preheating of the CRBO improved performance when compared with normal CRBO in both versions of the engine. Improvement in the performance was observed with the advancing of the injection timing and with the increase of injection pressure with the CRBO operation on both versions of the engine. CE with CRBO operation showed the optimum injection timing at 32°bTDC, while the LHR engine showed the optimum injection at 31°bTDC at an injection pressure of 190 bars. At the recommended injection timing and pressure, CRBO operation on CE increased smoke levels, decreased NOx levels, while LHR engine marginally increased smoke levels and drastically increased NOx levels when compared with pure diesel operation on CE. Preheating of the CRBO decreased smoke levels and NOx levels slightly in both versions of the engine. CE with CRBO operation decreased smoke levels and increased NOx levels, while LHR engine decreased smoke and NOx levels with the advancing of the

injection timing. With increase in injection pressure, smoke and NO_x levels decreased in both versions of the engine. Sound intensity decreased by 24% with CRBO operation on LHR engine at its optimum injection timing when compared with diesel operation on CE. At recommended injection timing with CRBO operation, sound intensities increased in CE while they decreased in LHR engine in comparison with pure diesel operation on CE. Sound intensities decreased with advanced injection timing and increase of injection pressure with both versions of the engine at different operating conditions of the CRBO operation. Lower peak pressures and more TOPP were observed with normal CRBO in CE. LHR engine with CRBO operation increased PP and decreased TOPP when compared with CE. Preheating increased PP and decreased TOPP when compared with normal CRBO operation on both versions of the engine. Lower peak pressures were observed in CE, while higher peak pressures in the LHR engine with CRBO operation at the recommended injection timing and pressure.

ACKNOWLEDGMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out research work. Financial assistance provided by All India Council for Technical Education (AICTE), New Delhi, was greatly acknowledged.

REFERENCES OF LITERATURE

1. Pramanik, K., Properties and use of jatropha curcas oil and diesel fuel blends in compression ignition engine. *Journal of Renewable Energy*, **2003**, 28(2), 239- 48.
2. Forson, F.K., Oduro, E.K. and Hammond-Donkoh, E., Performance of jatropha oil blends in a diesel engine. *Renewable Energy*, **2004**, 29, 1135-1145.
3. Pugazhivadivu, M. and Jayachandran, K., Investigations on the performance and exhaust emissions of a diesel engine using preheated waste frying oil as fuel. *Renewable energy*, **2005**, 30(14), 2189-2202.
4. Saravanan, S., Nagarajan, G., Lakshmi Narayana Rao, G. and Sampath, S., Feasibility study of crude rice brawn oil as a diesel substitute in a DI-CI engine without modifications. *Energy for Sustainable Development*, **2007**, 11(3), 83-92.
5. Deepak Agarwal, Lokesh Kumar, Avinash Kumar Agarwal. Performance evaluation of vegetable oil fuelled compression ignition engine. *Renewable Energy*, **2008**, 33(6), 1147-1156.
6. Acharya, S.K., Swain, R.K. and Mohanti, M.K., The use of rice bran oil as a fuel for a small horse-power diesel engine. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, **2009**, 33(1), 80-88.
7. Venkanna, B.K., Venkataramana Reddy, C., Swati B. and Wadawadagi, Performance, emission and combustion characteristics of direct injection diesel engine running on rice bran oil / diesel fuel blend. *International Journal of Chemical and Biological Engineering*, **2009**, 2(3), 131-137.
8. Misra, R.D., Murthy, M.S., Straight vegetable oils usage in a compression ignition engine—A review. *Renewable and Sustainable Energy Reviews*, **2010**, 14, 3005-3013.
9. Murali Krishna, M.V.S., Performance evaluation of low heat rejection diesel engine with alternate fuels. PhD Thesis, J. N. T. University, Hyderabad, **2004**.
10. Sukumar Puhan, Vedaraman, N., Sankaranarayanan, G., Boppana and Bharat Ram, V., Performance and emission study of Mahua oil (madhuca indica oil) ethyl ester in a 4-stroke natural aspirated direct injection diesel engine, *Renewable Energy*, **2004**, 8, 1269-1278
11. Shailendra Sinha and Avinash Kumar Agarwal. Performance evaluation of a biodiesel (rice bran oil methyl ester) fuelled transportation diesel engine. SAE. Paper No. **2005-01-1730**
12. Agarwal, A. K., Bio-fuels (alcohols and biodiesel) applications as fuels for internal combustion engines. *International Journal of Progress in Energy and Combustion Science*, **2006**, 33, 233-271.
13. Gajendra Babu, M. K., Chandan Kumar. And Lalit M. Das., Experimental investigations on a karanja oil methyl ester fuelled DI diesel engine. SAE. Paper No. **2006-01-0238**
14. Jiwak Suryawanshi., Performance and emission characteristics of CI engine fueled by coconut oil methyl ester. SAE Paper No. **2006-32-0077**.
15. Sukumar Puhan and Nagarajan, G., NO_x reduction in a DI diesel engine using biodiesel as a renewable fuel. *International Journal of Sustainable Energy*, **2008**, 27(3), 143-154.
16. Jayant Singh, Mishra, T.N., Bhattacharya, T.K. and Singh, M.P., Emission characteristics of methyl ester of rice bran oil as fuel in compression ignition engine. *International Journal of Chemical and Biological Engineering*, **2008**, 1(2), 62-66.
17. Shailendra Sinha, Avinash Kumar Agarwal, Rice brawn oil methyl ester fuelled medium-duty transportation engine: long-term durability and combustion investigations. *International Journal of Vehicle Design*, **2009**, 50 (1), 248 - 270
18. Venkanna, B.K., Venkataramana Reddy, C., Swati B. and Wadawadagi, Performance, emission and combustion characteristics of direct injection diesel engine running on rice bran oil / diesel fuel blend. *International Journal of Chemical and Biological Engineering*, **2009**, 2(3), 131-137.
19. Jindal, S., Nandwana, B.P., Rathore, N.S. and Vashistha, V., Experimental investigation of the effect of compression ratio and injection pressure in a direct injection diesel engine running on Jatropha methyl ester", *Applied Thermal Engineering*, **2010**, 30, 442-448.
20. Ridvan Arslan, Emission characteristics of diesel engine using waste cooking oil as biodiesel fuel. *African Journal of Bio-Technology*, **2011**, 10(9), 3790-3794.
21. Jinlin Xue, Tony E. Grift, Alan C. Hansen., Effect of bio-diesel on engine performances and emissions. *Renewable and Sustainable Energy Reviews*, **2011**, 15, 1098-1116.
22. Jaichandar, S. and Annamalai, K., The status of biodiesel as an alternative fuel for diesel engine- An Overview, *Journal of Sustainable Energy & Environment*, **2011**, 2, 71-75
23. Taymaz, I., Cakir, K., Gur, M. and Mimaroglu, A., Experimental investigation of heat losses in a ceramic cooled diesel engine. *Surface and Coatings Technology*, **2003**, 169, 168-170.
24. Taymaz, I., An experimental study of energy balance in low heat rejection diesel engine. *Energy*, **2006**, 31(2-3), 364-371.
25. Parlak, A., Yasar, H. and Eldogan O., The effect of thermal barrier coating on a turbocharged Diesel engine performance and exergy potential of the exhaust gas. *Energy Conversion and Management*, **2005**, 46(3), 489-499.
26. Ekrem, B. Tahsin, E. and Muhammet, C., Effects of thermal barrier coating on gas emissions and performance of a LHR engine with different injection timings and valve adjustments. *Journal of Energy Conversion and Management*, **2006**, 47, 1298-1310.
27. Ciniviz, M., Hasimoglu, C., Sahin, F. and Salman, M. S., Impact of thermal barrier coating application on the performance and emissions of a turbocharged diesel engine. *Proceedings of The Institution of Mechanical Engineers Part D-Journal Of Automobile Engineering*, **2008**, 222 (D12), 2447-2455.
28. Hanbey Hazar, Effects of bio-diesel on a low heat loss diesel engine. *Renewable Energy*, **2009**, 34, 1533-1537.
29. Modi, A.J. and Gosai, D.C., Experimental study on thermal barrier coated diesel engine performance with blends of diesel and palm bio-diesel. *SAE International Journal of Fuels and Lubricants*, **2010**, 3 (2), 246-259.
30. Rajendra Prasad, B., P. Tamilporai, P. and Mohd. Shabir, F., Analysis of combustion, performance and emission characteristics of low heat rejection engine using biodiesel. *International Journal of Thermal Sciences*, **2010**, 49, 2483-2490.
31. Mohamed Musthafa, M., Sivapirakasam, S.P. and Udayakumar. M. Comparative studies on fly ash coated low heat rejection diesel engine on performance and emission characteristics fueled by rice bran and pongamia methyl ester and their blend with diesel. *Energy*, **2011**, 36(5), 2343-2351.
32. Rama Mohan, K., Vara Prasad, C.M. and Murali Krishna, M.V.S. Performance of a low heat rejection diesel engine with air gap insulated piston. *ASME Journal of Engineering for Gas Turbines and Power*, **1999**, 121(3), 530-540.
33. Krishna Murthy, P. V. Studies on biodiesel in low heat rejection diesel engine. PhD Thesis, J.N.T. University, Hyderabad., **2010**.